DECK FLOORING

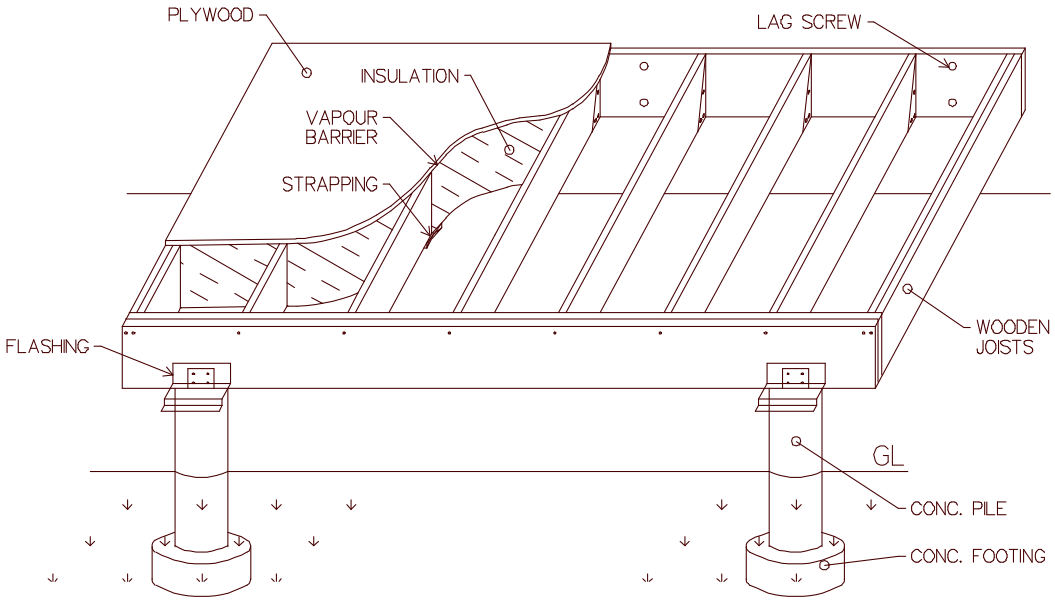

PIER FOUNDATION

Deck flooring should be 2” X 10” construction, 16” on center. Vapour barrier, insulation & ¾” tongue and groove plywood on top.

Or, can be concrete slab 3½” – 4” thick. Concrete slab must have a continuous concrete foundation or footing.

CONTINUOUS FOUNDATION

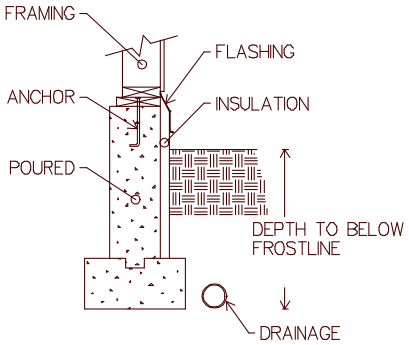

CONTINUOUS FOUNDATION

Foundation can be a continuous concrete foundation or pier pilings, spaced 7’ – 8’ apart. Can be approx. 2’ inset from edge of deck.